

Standalone three-phase UPS system

PowerWave 33 60–500 kW Unmatched power performance

PowerWave 33 - the powerhouse

ABB has always set global standards in uninterruptible-powersupply solutions. The latest generation of PowerWave 33 is the continuation of ABB's renowned tradition of developing state-of-the-art UPS systems, focusing on delivering the best combination of energy-efficiency and overall power performance in the industry.

Offering maximum power protection, the PowerWave 33 helps you to use less energy and takes up less space, resulting in significant cost savings.

The PowerWave 33's exceptional design meets all modern requirements of building and operating energy-efficient and environmentally friendly data centers. The PowerWave 33 employs transformerless double conversion UPS topology and is available from 60 to 500 kW.

The PowerWave 33 boasts features and options that cater to customers' needs, including the flexibility to accommodate an increase in power requirements and to provide n+1 parallel redundancy. Easy installation and maintenance form the basis of the core design for this standalone UPS system with front access to electrical connections and fully serviceable components.

Further highlights

- Up to 96 % efficiency in double conversion mode minimizes running costs
- Maximized output active power (kVA = kW)
- Excellent input performance minimizes installation costs
- Power density up to 363 kW/m² minimizes space requirements
- Full front access maximizes system serviceability



PowerWave 33 (500 kW)

Up to 96 % AC-AC efficiency

1.0 Output power factor

Fully scalable up to 5 MW

High efficiency and lowest total cost of ownership

Power performance, which is measured by systemefficiency, input THDi and input and output power factor is the foundation of the PowerWave 33. In the normal online double conversion mode, the PowerWave 33 delivers class-leading efficiency of up to 96 percent.

Efficiency

With a transformerless design and Energy Saving Inverter Switching (ESIS) technology, the PowerWave 33 delivers high efficiency at partial and full load (up to 96 percent in double conversion online mode). This level of efficiency dramatically reduces the total cost of ownership of the UPS system during its life cycle. In addition to lower operating costs, the PowerWave 33 extends the service life of components, thereby greatly increasing overall power performance.

Low input current total harmonic distortion (THDi)


The PowerWave 33 actively manages the input current total harmonic distortion (THDi) at a low level (3.5 percent at 100 percent load). ABB's unique technology neutralizes the emission of harmonics at the input of the UPS system, providing greater reliability of operations for circuit breakers and extending the overall service life of the equipment. Low harmonic distortion saves unnecessary oversizing of gensets, cabling and circuit breakers, avoids extra heating of input transformers and extends the overall service life of all upstream components.


Near-to-unity input power factor


Thanks to the near-to-unity input power factor of 0.99, even with partial loads, the PowerWave 33 reduces the input installation costs by enabling the use of smaller cables. Furthermore it avoids the unnecessary use of additional phase compensating devices, which consequently keeps the overall UPS-efficiency high.


Fully rated output power

The PowerWave 33 can supply loads from 0.9 leading to 0.9 lagging without derating.

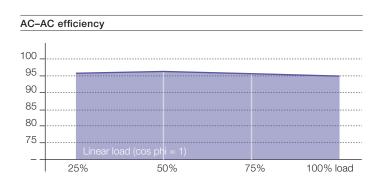

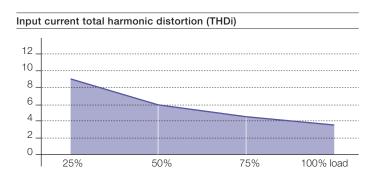

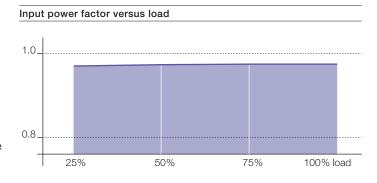

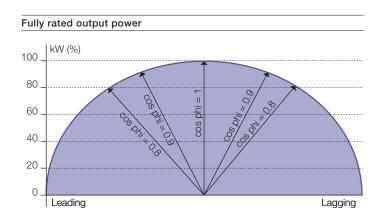

Technical specifications

60 kW	80 kW	100 kW	120 kW	160 kW	200 kW	250kW	300 kW	400 kW	500 kW	
60 kW	80 kW	100 kW	120 kW	160 kW	200 kW	250 kW	300 kW	400 kW	500 kW	
1.0				
True onlir	ne double co	nversion	.				·····	· · · · · • · · · · · · · · · · · · · ·		
Up to 10	units								.	
Standalo	ne									
Bottom front Bottom front or top										
Optional										
3×380/2	220 V + N, 3 >	< 400/230 V	+ N, 3 × 415	/240 V + N						
For loads	s < 100 % (–2	3 %, +15 %),	< 80 % (-30)%, +15%),	< 60 % (-40 °	%, +15%)				
≤3.5% at	t 100 %						•		•	
35–70 Hz	7	•	•				•	•		
0.99 at 1	00 % load	***************************************	••••	•••••			•••••	•••••		
3×380/2	220 V + N, 3 >	< 400 / 230 V	+ N, 3 × 415	/240 V + N						
<2%										
50 or 60 Hz										
10 min.: up to 125 % or 1 min.: up to 150 %										
3:1	••••••	•••••	••••	•••••	•••••	••••	•••••	•••••		
Up to 96	%									
98 %	•••••	····· •		·····•						
-25-70°	C									
0-40 °C	•••••	····· • · · · · · · · · · · · · · · · ·		····· •····				•••••	····•	
1000 m v	vithout derati	ing	••••	•••••	•••••	••••	•••••	•••••		
Sealed, le	ead-acid, ma	aintenance-fr	ee or NiCd							
	,									
Yes										
LED for notification and alarm										
,		,								
IEC/EN 6	62040-1									
		.	.	.	· · · · · · · · · · · · · · · · · · ·	····· •·····	· · · · · · · · · · · · · · · · · · ·	····· •····	.	
1207 214	02010 2									
IFC/FN 6	62040-3	·····•	·····	·····	•••••	• • • • • • • • • • • • • • • • • • • •		·····	····•	
··•···		·····•	····•	·····•	····· •····		·····•	····· •····	···· •····	
··•···		·····•	····•	·····•	····· •····	•••••	·····•	····· •····	···· •····	
··•···	1.2008 180 4	14001.2004	.	<u>.</u>	·····		·····	<u>.</u>	.	
100 9001	.2000, 130	1+001.2004								
0001:~	0.401.00	0.451.~	0001:~	0001:~	0101.0	2001	4101.0	0501:~	10001:	
∠JU Kg			∠¤∪kg	·····	<u>.</u>	.	<u>.</u>		1000 kg	
	·····•	·····•	····•	020 × 1820 ×	x / DU	1100×19	12U × 15U	1900×19	94 × 850	
	180) × 1820 >									
	60 kW 1.0 True onlin Up to 10 Standalo Bottom f Optional 3 × 380 / 3 ≤ 3.5% a 35-70 Hz 0.99 at 1 3 × 380 / 3 < 2 % 50 or 60 10 min.:: 1 100 % pc 3 : 1 Up to 96 98 % -25-70 ° 0-40 °C 1000 m v Sealed, le Yes LED for r USB, RS IEC / EN (60 kW 80 kW 1.0 True online double co Up to 10 units Standalone Bottom front Optional 3 × 380/220 V + N, 3 × For loads < 100 % (-2 ≤3.5% at 100 % 35-70 Hz 0.99 at 100 % load 3 × 380/220 V + N, 3 × <2 % 50 or 60 Hz 10 min.: up to 125 % 100 % possible 3 : 1 Up to 96 % 98 % -25-70 °C 0-40 °C 1000 m without derate Sealed, lead-acid, max Yes LED for notification and USB, RS-232, SNMP IEC/EN 62040-1 IEC/EN 62040-2 IEC/EN 62040-3 CE IP 20 ISO 9001:2008, ISO 230 kg 230 kg 240 kg	1.0 True online double conversion Up to 10 units Standalone Bottom front Optional 3 × 380 / 220 V + N, 3 × 400 / 230 V For loads < 100 % (-23 %, +15 %), ≤ 3.5% at 100 % 35-70 Hz 0.99 at 100 % load 3 × 380 / 220 V + N, 3 × 400 / 230 V < 2 % 50 or 60 Hz 10 min.: up to 125 % or 1 min.: up 100 % possible 3 : 1 Up to 96 % 98 % -25-70 °C 0-40 °C 1000 m without derating Sealed, lead-acid, maintenance-from the control of	60kW 80kW 100kW 120kW 1.0 True online double conversion Up to 10 units Standalone Bottom front Optional 3 × 380/220V+N, 3 × 400/230V+N, 3 × 415 For loads < 100 % (-23 %, +15 %), < 80 % (-30 %) \$35-70 Hz 0.99 at 100 % load 3 × 380/220V+N, 3 × 400/230V+N, 3 × 415 < 2 % 50 or 60 Hz 10 min.: up to 125 % or 1 min.: up to 150 % 100 % possible 3 : 1 Up to 96 % 98 % -25-70 °C 0-40 °C 1000 m without derating Sealed, lead-acid, maintenance-free or NiCd Yes LED for notification and alarm USB, RS-232, SNMP slot, potential-free contains IEC/EN 62040-1 IEC/EN 62040-2 IEC/EN 62040-3 CE IP 20 ISO 9001:2008, ISO 14001:2004	10	60 kW 80 kW 100 kW 120 kW 160 kW 200 kW 1.0 True online double conversion Up to 10 units Standalone Bottom front Optional 3 x 380 / 220 V + N, 3 x 400 / 230 V + N, 3 x 415 / 240 V + N For loads < 100 % (-23 %, +15 %), < 80 % (-30 %, +15 %), < 60 % (-40 %) < 3.5% at 100 % 33.5% at 100 % 35-70 Hz 0.99 at 100 % load 3 x 380 / 220 V + N, 3 x 400 / 230 V + N, 3 x 415 / 240 V + N < 2 % 50 or 60 Hz 10 min.: up to 125 % or 1 min.: up to 150 % 100 % possible 3 : 1 Up to 96 % 98 % -25-70 °C 0-40 °C 1000 m without derating Sealed, lead-acid, maintenance-free or NiCd Yes LED for notification and alarm USB, RS-232, SNMP slot, potential-free contacts IEC/EN 62040-1 IEC/EN 62040-3 CE IP 20 ISO 9001:2008, ISO 14001:2004 230 kg 240 kg 246 kg 280 kg 290 kg 310 kg	BOKW	60 kW 80 kW 100 kW 120 kW 160 kW 200 kW 250 kW 300 kW 1.0 True online double conversion Up to 10 units Standalone Bottom front Optional 3 × 380 / 220 V + N, 3 × 400 / 230 V + N, 3 × 415 / 240 V + N For loads < 100 % (-23 %, +15 %), < 80 % (-30 %, +15 %), < 60 % (-40 %, +15 %) \$ 3.5% at 100 % 35-70 Hz 0.99 at 100 % load 3 × 380 / 220 V + N, 3 × 400 / 230 V + N, 3 × 415 / 240 V + N < 2 % 50 or 60 Hz 10 min: up to 125 % or 1 min.: up to 150 % 100 % possible 3 : 1 Up to 96 % 98 % \$ 40 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	60kW 80kW 100kW 120kW 180kW 200kW 250kW 300kW 400kW 1.0 True online double conversion Up to 10 units Standalone Bottom front Bottom	

Solution flexibility











PRODUCT TYPES	60–100 kW	60–100 kW	120-200 kW	250-300 kW	400–500 kW
Included battery enclosure	No	Yes, battery	No	No	No
		enclosure type A or B			
Dimensions	550 × 1820 × 750	970 × 1820 × 750 or	850 × 1820 × 750	1100×1920×750	1650 × 1994 × 850
$W \times H \times D$ (mm)		$1180 \times 1820 \times 750$			

PowerWave 33 - product range


The PowerWave 33 is available in various configurations. The smaller units (60, 80 and 100 kW) are available with integrated enclosures to accommodate batteries. Front access facilitates installation and servicing of the batteries. To accommodate the batteries for PowerWave 33 units ranging from 120 to 500 kW, external battery enclosures are required.

Top cable entry option for the 400-500 kW UPS

Optionally a top cable entry enclosure may be used for the $400-500\,\mathrm{kW}$ UPS. This enclosure extends the overall width of the UPS by $500\,\mathrm{mm}$. It can be positioned on either side of the UPS and permits the connection of all incoming AC/DC power cables from above.

Advanced scalable architecture

If additional capacity or redundancy is needed, up to 10 independent UPS units can operate in parallel configuration, achieving a total power capacity of up to 5 MW. In all parallel configurations, each PowerWave 33 unit operates independently but is securely synchronized with the others using the ABB DPA (Decentralized Parallel Architecture). This scalable architecture keeps the purchasing and operating costs of your power protection solutions exceptionally low. As your power requirements grow, the UPS system grows with them – thanks to its flexible scalability – even in the most confined spaces.

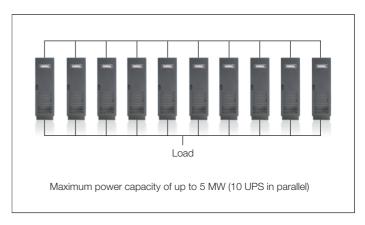

Parallel configuration for power extension or redundancy.

04-2830_PW33_EN | Printed in Switzerland, 2012

www.abb.com/ups ups.sales@ch.abb.com © Copyright ABB. All rights reserved. Specifications subject to change without notice.









